




Čerpací výkon v litroch za minútu v pomere k výtlačnej výške

	0	1	2	3	4	5	6	7
l/s	0	60	120	180	240	300	360	420
l/min	0	3.6	7.2	10.8	14.4	18.0	21.6	25.2
m ³ /h	0	3.6	7.2	10.8	14.4	18.0	21.6	25.2
1 DG blue 40/2/G40V A1BM5		5.2	4.0	2.8	1.7			
2 DG blue 50/2/G40V A1BM5		6.7	5.5	4.2	2.9	1.6		
3 DG blue 75/2/G40V A1BM5		9.5	8.5	7.2	5.7	4.2	2.6	
4 DG blue 100/2/G40V A1BM5		11.2	10.2	9.1	7.6	6.0	4.3	2.7

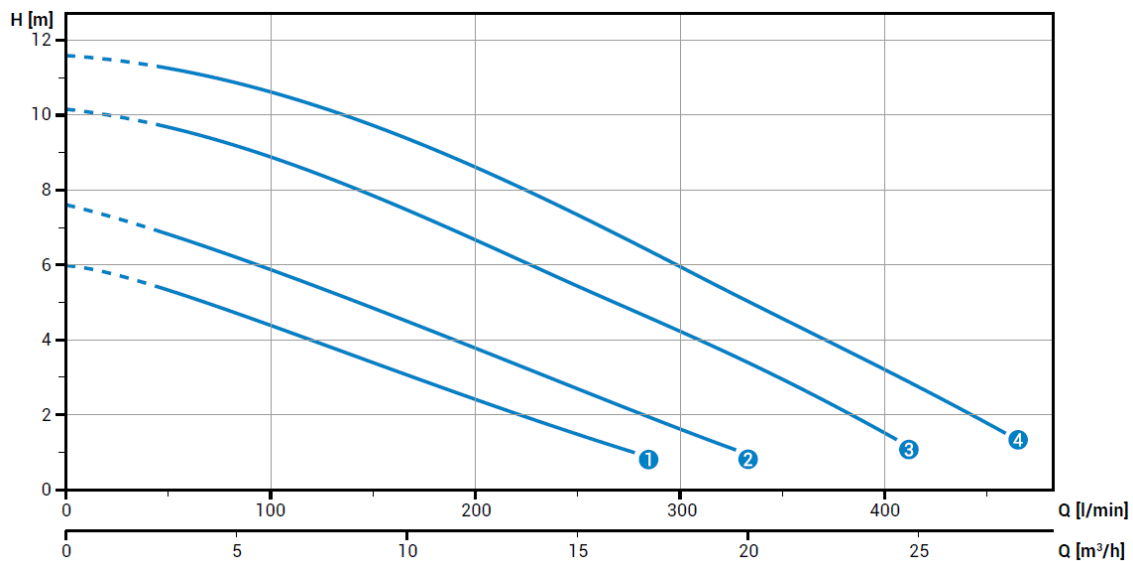

Verzia **12**

05/SH 5m dĺžka káblu so schuko zástrčkou
10/SH 10m dĺžka káblu so schuko zástrčkou

	1	2	3	4	5	6	7	8	9	10
	V	1 ~ 3 ~	DOL Y/Δ	P2 [kW]	Poles [r.p.m]	Q [l/sec]	H [m]			
11 DG blue 40/2/G40V A1BM										
1050.002 05/SH 12	230	1 ~	DOL	0.3	2 [2900]	0.5 ÷ 4.6	1.0 ÷ 5.6	G 1 1/2"	40	-
1050.003 10/SH										
DG blue 50/2/G40V A1BM										
1054.002 05/SH	230	1 ~	DOL	0.37	2 [2900]	0.5 ÷ 5.5	1.0 ÷ 7.1	G 1 1/2"	40	-
1054.003 10/SH										
DG blue 75/2/G40V A1BM										
1058.001 05/SH	230	1 ~	DOL	0.55	2 [2900]	0.5 ÷ 6.8	1.3 ÷ 9.9	G 1 1/2"	40	-
1058.003 10/SH										
DG blue 100/2/G40V A1BM										
1046.002 05/SH	230	1 ~	DOL	0.74	2 [2900]	0.5 ÷ 7.7	1.5 ÷ 11.5	G 1 1/2"	40	-
1046.003 10/SH										

Legenda:

- | | | |
|---|--|------------------------------|
| 1 Voltáž | 4 Výkon | 8 Pripojenie výtlačku |
| 2 Fázy motora | 5 Počet pólov [otáčky za min] | 9 Priechodnosť |
| 3 Štart DOL = Napriamo;
Y/Δ = Hviezda/Trojuholník | 6 Prietok [min ÷ max] | 10 Fréma |
| | 7 Výtlačok do výšky [min ÷ max] | 11 Model |
| | | 12 Verzia |